

FLIR TG 165

IR Thermometer



Introducing the FLIR TG165 Imaging IR Thermometer

FIND AN UNSEEN WORLD OF PROBLEMS ORDINARY METERS MISS

Bridging the gap between single spot IR thermometers and FLIR's legendary infrared cameras, the TG165 gives you the advantage of thermal imaging to help you discover temperature issues you can't see with typical spot radiometers. You'll work more quickly and have confidence you won't miss anything vital.


Equipped with FLIR's exclusive Lepton® micro thermal camera, the TG165 helps you identify heat patterns, reliably measure temperature, and store images and data for reports. And with a spot ratio of 24 to 1, you can take accurate readings from safer distances. The TG165 is simple to operate, featuring intuitive menu icons and dual laser pointers. Built by the world leader in thermal technology, the durable TG165 will quickly become your "go to" temperature tool.

KEY BENEFITS

- See heat issues clearly
- Measure temperature more accurately
- Document your work with images
- Trust the rugged durability
- Target the right spot
- Troubleshoot quickly
- Stay safer and more aware
- Fits every budget



HVAC Inspections

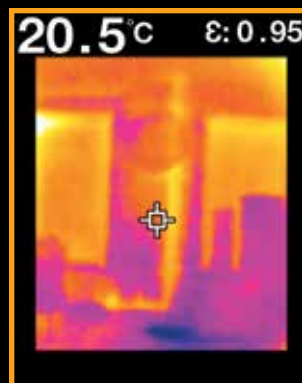

Warm Pipe in Wall



Mechanical Overheating



Predictive M




KEY FEATURES


- 1 True Thermal Imaging**
– FLIR Lepton delivers best image quality in its class
- 2 Portable, Ergonomic Design**
– Balanced, contoured grip
- 3 Tripod Mount / Lanyard Connection**
- 4 Simple to Operate**
– Intuitive buttons and menu icons
- 5 Rugged and Reliable**
– Withstands a 2-meter drop
- 6 Dual Pointer Lasers**
– Frame your area of interest
- 7 Convenient Pull Trigger**
– Activates lasers and freezes images
- 8 Store Images and Data**
– Removable micro SD card, mini USB port for downloading images and charging internal battery



Maintenance

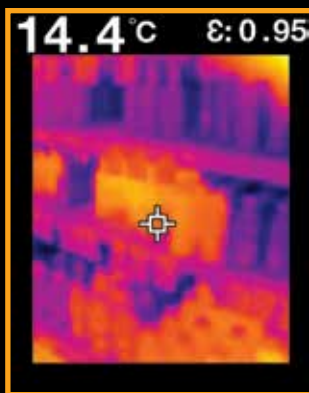

Refrigeration Issues

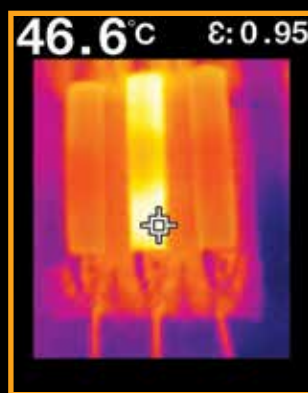

Hot Fuses



Electrical Troubleshooting

SPECIFICATIONS

IR Temperature Measurement

Basic Accuracy	+/- 1.5% or 1.5°C
Range	-25 to 380°C, -13 to 716°F
Emissivity	4 Pre-Set Levels with Custom Adjustment, 0.1 to 0.99
Dist. to Spot Ratio (D:S)	24:1
Measurement Resolution	0.1 °C / °F
Response Time	150 Milliseconds
Spectral Response	8 to 14µm
Lasers	Dual Diverging Lasers, Frames Temp Measurement Area

Thermal Imaging

Imaging Detector	FLIR Lepton® Microbolometer Focal Plane Array (FPA)
Shutter	Integrated Automatic Shutter
Image Resolution (H x W)	4,800 Pixels (80 x 60)
Spectral Response	8 to 14µm
Field of View (H x W)	50° x 38.6°
Upper Scene Range	127°C, 260°F (400K)
Thermal Imaging Sensitivity	150mK
Frame Rate	9 Hz
Color Palettes	2 (Grey Scale, Hot Iron)
Saved Image Format	Bitmap (BMP) Image with Temperature and Emissivity

General

Unit Size (H x W x D)	186 x 55 x 94 mm (7.3 x 2.2 x 3.7 in)
Display Type	2.0 in TFT LCD
Display Resolution (W x H)	38,720 Pixels (176 x 220)
Battery	Rechargeable via Micro USB Lithium-ion Battery: 3.7V, 2600mAh
Auto Power Off	Yes, Adjustable with Disable
Battery Life Hours	Typical Use: Five 8-Hr Work Days; Continuous Use: 8 Hrs
Certifications	CE / CB / FCC / FDA
Memory	8Gb Micro SD Card
Operating Temperature	-10 to 45°C, 14 to 113°F
Drop Test	Designed for 2 Meter, 6.5 Feet
Tripod Mount	1/4 in - 20 on Handle Bottom
Warranty	2 Years Product, and 10 Years Thermal Imaging Detector when registered within 60 days of purchase.
Includes	Lanyard, USB Cable, International Charger (US, UK, EU, AU, CN) 8 Gb Micro SD Card, Technical Documentation



ORDERING INFORMATION

TG165	Imaging IR Thermometer
TA13	EVA Protective Case for TG165
TA14	Belt Holster for TG165

BELGIUM

FLIR Commercial Systems
Luxemburgstraat 2
2321 Meer
Tel. : +32 (0) 3665 5100
Fax : +32 (0) 3303 5624
E-mail : flir@flir.com

GERMANY

FLIR Systems GmbH
Berner Strasse 81
D-60437 Frankfurt am Main
Tel. : +49 (0)69 95 00 900
Fax : +49 (0)69 95 00 9040
E-mail : flir@flir.com

SWEDEN

FLIR Systems AB
Antennvägen 6
187 66 Täby
Tel. : +46 (0)8 753 25 00
Fax : +46 (0)8 753 23 64
E-mail : flir@flir.com

FRANCE

FLIR Systems France
20, bd de Beaubourg
77183 Croissy-Beaubourg
Tel. : +33 (0)1 60 37 55 02
Fax : +33 (0)1 64 11 37 55
E-mail : flir@flir.com

UNITED KINGDOM

FLIR Systems UK
2 Kings Hill Avenue - Kings Hill
West Malling
Kent
ME19 4AQ
Tel. : +44 (0)1732 220 011
Fax : +44 (0)1732 843 707
E-mail : flir@flir.com

ITALY

FLIR Systems Italy
Via Luciano Manara, 2
I-20812 Limbiate (MB)
Tel. : +39 (0)2 99 45 10 01
Fax : +39 (0)2 99 69 24 08
E-mail : flir@flir.com

PORTLAND

Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

SPAIN

FLIR Commercial Systems
Avenida de Bruselas, 15- 3º
28108 Alcobendas (Madrid)
Tel. : +34 91 573 48 27
Fax : +34 91 662 87 48
E-mail : flir@flir.com

MIDDLE EAST

Dubai Airport Free Zone
P.O. Box 54262
Office B-22, Street WB-21
Dubai - United Arab Emirates
Tel. : +971 4 299 6898
Fax : +971 4 299 6895
E-mail : flir@flir.com

RUSSIA

FLIR Systems Russia
6 bid.1, 1st Kozjevicheskoy lane
115114 Moscow
Russia
Tel. : + 7 495 669 70 72
Fax : + 7 495 909 93 02
E-mail : flir@flir.com

www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2014 FLIR Systems, Inc. All rights reserved. 091714