
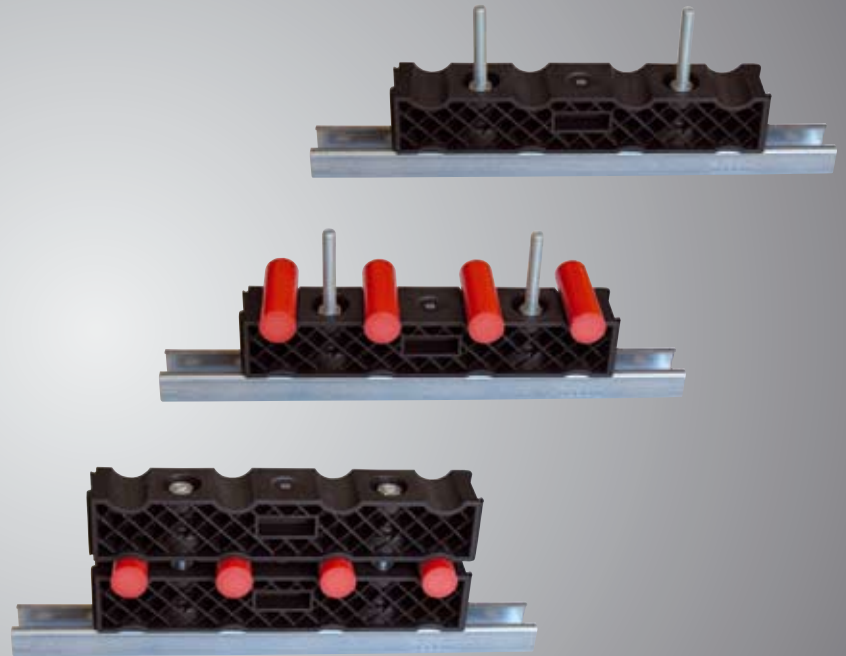


Dutchclamp®

Cable Blocks - Unifix IM type

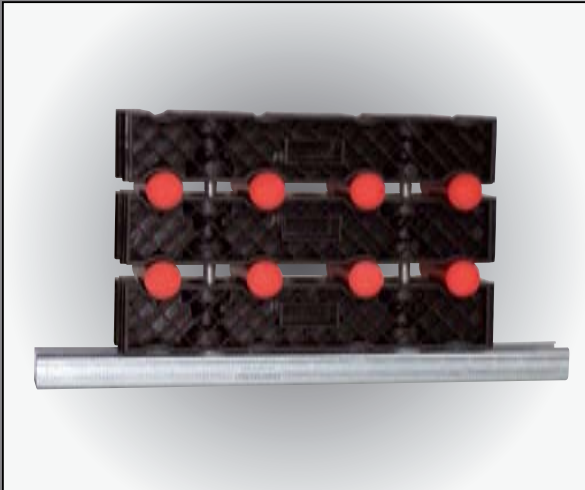

Unifix IM types are suitable for fastening cables with a diameter of 12 mm (0.45 inch) up to 32 mm (1.26 inch). By means of 2 block parts, 4 cables can be fastened along side each other. On the basis of the number of cables to be fastened, you define the number of block parts you need. 2 Block parts for 4 cables, 3 block parts for 8 cables and so on. If you wish to fasten more cables along side each other, you can couple the block parts by means of the clever dovetail connection.

Unifix IM types are, due to the chosen pressure areas, unique in their kind. The pressure areas, which fully support the cables, are massive and do not have any sharp edges. Because of this the cables are well fixated without getting damaged and therefore ideal for installations where cables are subject to top short circuits. The cable blocks are constructed in such a way that they have an exceptionally high mechanical strength of **29.500 Nm**. The dimensions of the mounting holes are chosen carefully as well. These have a diameter of 13,2 mm (0.52 inch). Because of this the threaded rods can be lengthened at any position by means of threaded rod couplers.

Unifix IM types are manufactured from fibreglass-reinforced Polyamide and are unique in their additives, which results in a longer life span of 50 years. Polyamide is very well resistant against humidity, which makes the cable blocks suitable for both inside and outside installations. Because of the use of this raw material, the cable blocks are also resistant against corrosion, ozone, frost, oil, acids, salts, aggressive materials and UV radiation. There is no reduction of strength and signs of degrading within temperature ranges from -40°C up to +120°C.

Unifix IM blocks are tested by **The Underwriters Laboratories Inc.** in America.

Unifix IM types can be delivered directly from stock.

P.O. Box 9078 3301 AB Dordrecht The Netherlands
Egstraat 1 3319 LA Dordrecht The Netherlands
Phone : +31 (0)78 6 211 212
Fax : +31 (0)78 6 211 226
E-mail : export@dutchclamp.com
Site : www.dutchclamp.com




SLAGBOOM
ELECTRIC

No rights may be derived from the indicated sizes, as the products are subject to ongoing development. Slagboom Electric therefore reserves the right to implement these changes without notice.


Dutchclamp[®]

UNIFIX IM type

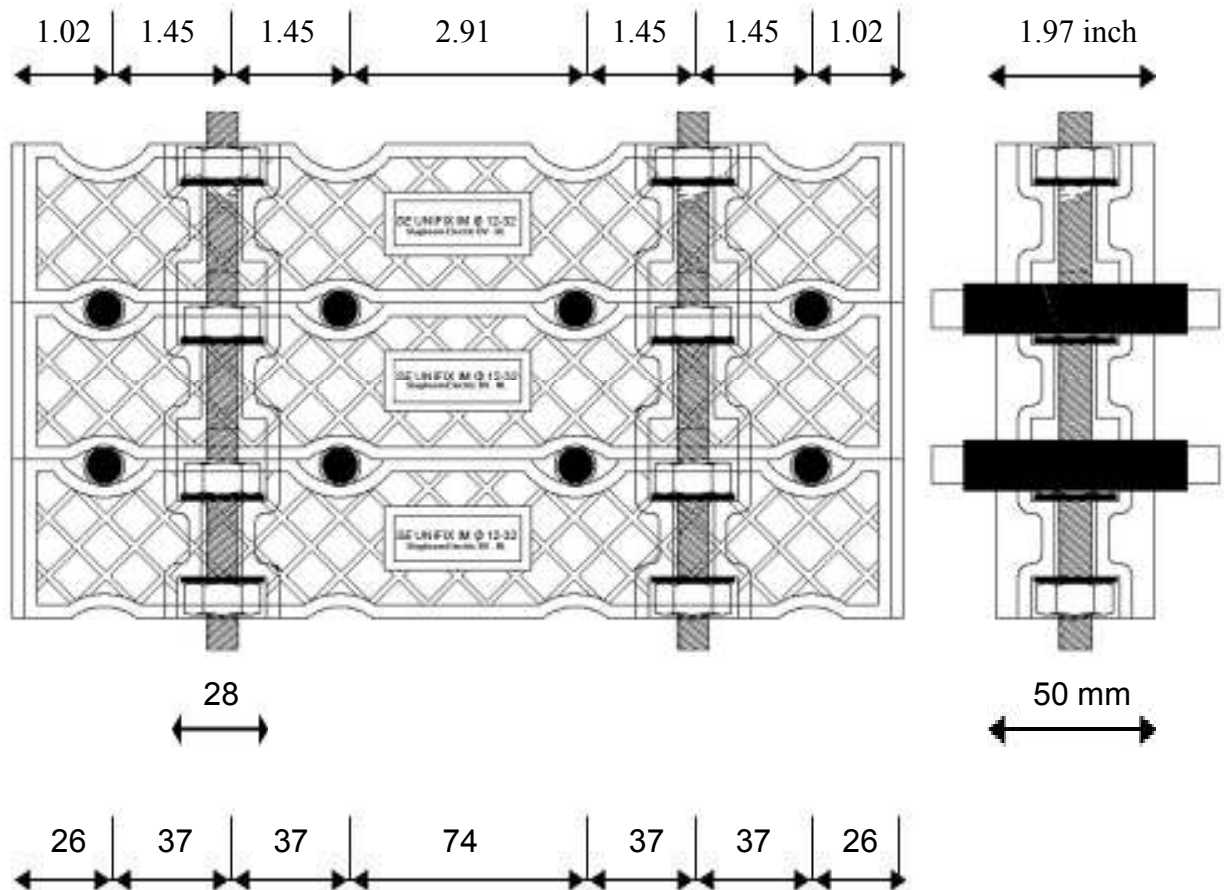

- | | | |
|----------|---------------------|-------------------------------------|
| 1 layer | (2 parts) to secure | 4 cables of 12 mm up until 32 mm Ø |
| 2 layers | (3 parts) to secure | 8 cables of 12 mm up until 32 mm Ø |
| 3 layers | (4 parts) to secure | 12 cables of 12 mm up until 32 mm Ø |
| 4 layers | (5 parts) to secure | 16 cables of 12 mm up until 32 mm Ø |
| 5 layers | (6 parts) to secure | 20 cables of 12 mm up until 32 mm Ø |

Mechanical resistance: 29.500 Nm

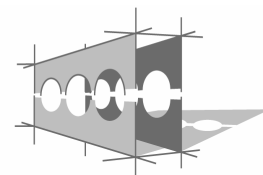


SLAGBOOM
ELECTRIC

P.O. Box 9078 3301 AB Dordrecht The Netherlands
 Egstraat 1 3319 LA Dordrecht The Netherlands
 Phone : +31 (0) 78 6 211 212
 Fax : +31 (0) 78 6 211 226
 E-mail : export@dutchclamp.com
 Site : www.dutchclamp.com


Dutchclamp®

UNIFIX IM тип 32-48

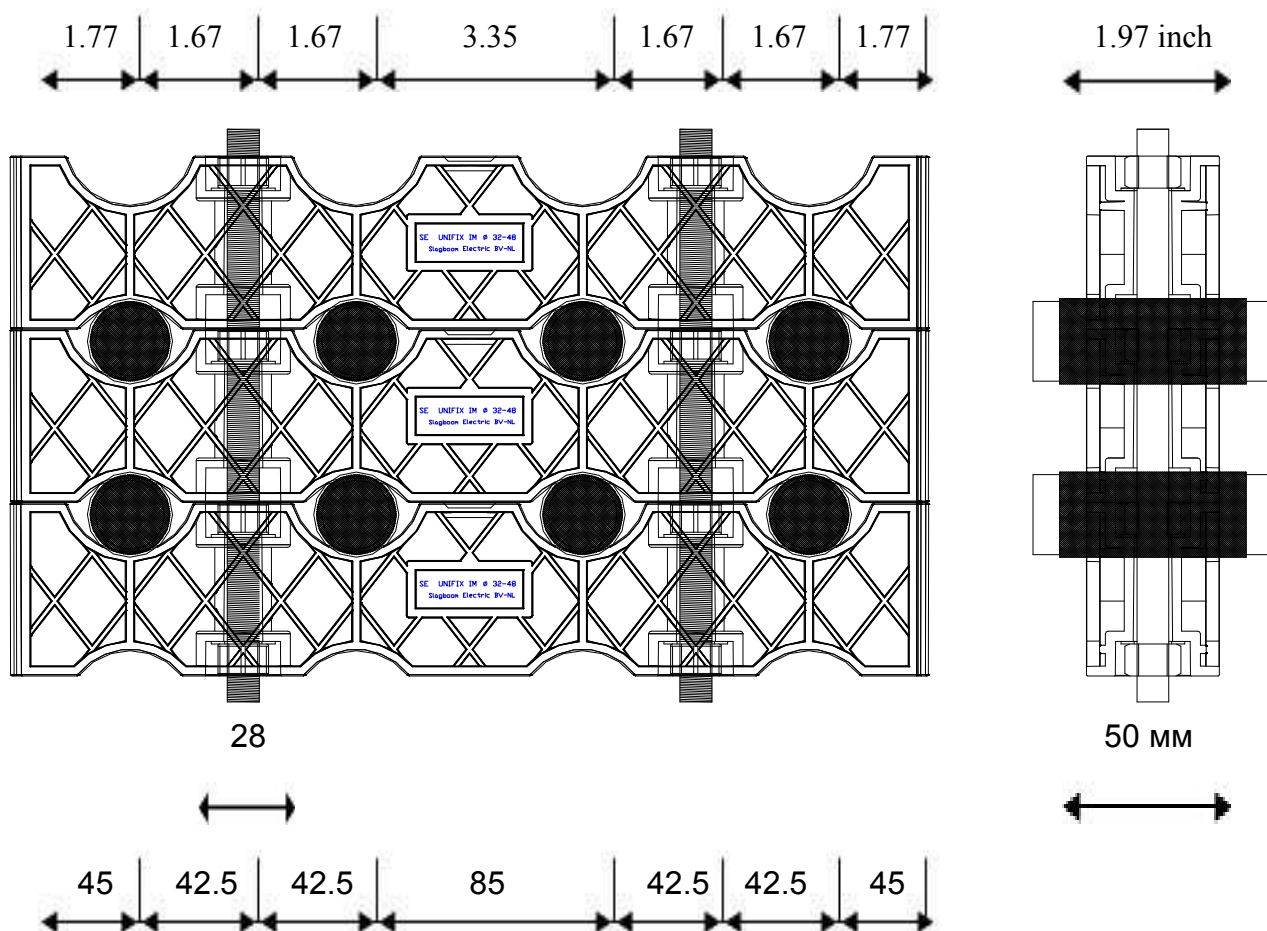

- 1 слой (2 части за закрепване на 4 кабеля 32 мм ~ 48 мм Ø)
- 2 слоя (3 части) за закрепване на 8 кабеля 32 мм ~ 48 мм Ø
- 3 слоя (4 части) за закрепване на 12 кабеля 32 мм ~ 48 мм Ø
- 4 слоя (5 части) за закрепване на 16 кабеля 32 мм ~ 48 мм Ø
- 5 слоя (6 части) за закрепване на 20 кабеля 32 мм ~ 48 мм Ø

Механична устойчивост: 29.500 Nm

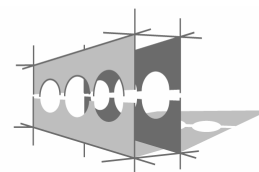

SLAGBOOM
ELECTRIC